


Symbol	Name of Part	Weight		Price
		Lb.	Ozs.	
GA212	Spark plug wire with terminal.			\$.80
GA214	Contact wire80
GA227	Gasoline piping, 1/4-inch - check valve to throttle	3		
GA227A	Gasoline piping, 1/8-inch bent - check valve to throttle.	2		.35
GA228	Gasoline feed pipe, 1/4-inch.	3		
GA228A	Gasoline feed pipe, 1/8-inch.			
GA230	Drain cock	3		1.20
GA258	Magneto arm			4.70
GA295	Spring clip			
GA260	Magneto lever80
GA261	Magneto screw			
IKC97	Return spring for magneto			
IKC186	Drive spring for magneto.			
GA262	Studs for magneto tank.	2		
GA522	Angle check valve with union for 1/4-inch pipe	1		10.75
GA522A	Angle check valve without union for 1/8-inch bent pipe.	3		3.50
GA523A	Poppet.	2		
GA524	Check valve cap			
GZ1½	Clamp (per piece)			
Z2	Gear for Jack.	12		6.20
GZ6	Face plate	4	3	2.00
GZ7A	Cross head with pin complete			2.90
GZ8	Pitman pin		10	1.05
GZ12	Wood pitmans, each			2.20

REPAIR LIST FOR FIVE-FOOT STEEL MILL

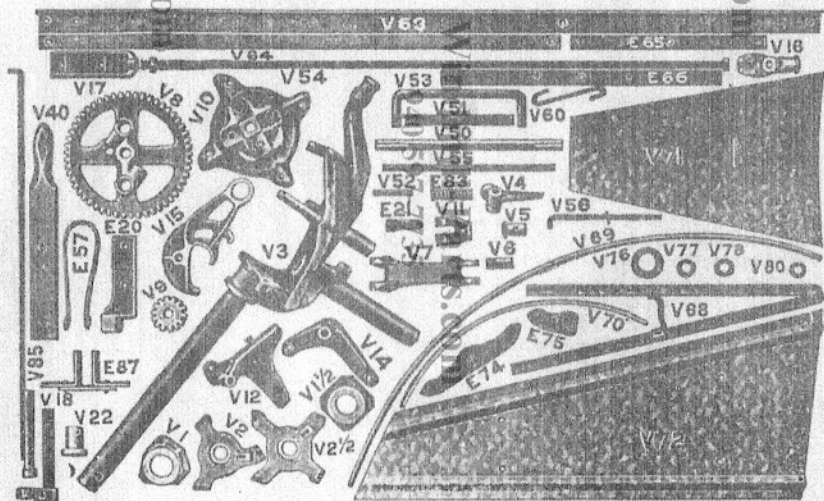

In ordering parts give both name and symbol of each part wanted.

Symbol	Name of Parts for 5 Ft. "V" Windmill	Weight		Price
		Lb.	Ozs.	
V101	Upper casting for No. 0 tower	2	8	\$
V1	Upper tower casting 3-post	2	3	.80
V1½	Upper tower casting 4-post	2	8	.80
V2	Lower tower casting 3-post	1	2	1.40
V2½	Lower tower casting 4-post	1	10	1.40
V3	Main casting	21		
V4	End trust casting		11	.80
V5	Bronze bushing for V8.		3	.95
V6	Bronze bushing for V3.		2	.80
V7	Pitman guide	1	5	1.20
V8	Crank gear with shaft & bushing.	7		
V9	Pinion		15	2.00
V10	Spider with shaft	8		
V11	Upper vane hinge		6	.70
V12	Lower vane hinge	2	8	1.75
V14	Bell crank	1	8	1.20
V15	Brake.	2		1.50
V16	Piston eye with clip.	1		1.40
V17	Pump pole socket	1	2	.80
V18	Swivel slide		11	1.05
E21	Grease plunger		3	.35
V22	Pipe collar		10	.80
V52	Guide pin		3	.35
V53	Pitman	1	3	1.50
V54	Piston rod 3' 7".	1	14	1.20
	Piston rod with V17.	2	3	
V55	Vane Pin		10	.80
V56	Brake rod		5	1.05
V60	Bell crank link		3	.35
V63	Vane stem		5	
V64	Vane truss.		2	8
E65	Vane rib - short		13	1.20
E66	Vane rib - long		1	2
V68	Arm.		2	5
V69	Outer rim		2	13
V70	Inner rim		1	10
V71	Sail with clip		3	.25
WC74	Sail clip - large		3	.15
WC75	Sail clip - small		3	.25
WB83	Brake spring.		3	.25
V85	Pull-out rod and swivel		14	2.35
WC88	Spring for pump coupler35
	Completed parts:			
WC120	Pump Coupler - assembly	2		1.60
V501-1	One section complete	8		

- Crank gear and shaft are always sent assembled.
- Spider and shaft are always furnished assembled.